


SI-099 MINIBEAM 50G



The MINIBEAM 50G features a 7500K 50W LED with high intensity and efficiency. It produces very high light output much higher than the 90W beam, through a specific 2° optic system. The PAN/TILT integrates in fast and quiet movement. It offers a full complement of professional characteristics, including a static gobo wheel (17 gobos plus open), a color wheel (14 colors plus open), a 8-facet prism, 0-100% linear LED dimmer, variable speed shutter/strobe.

PHOTOMETRIC BEAM ANGLE DATA
(FC=LUX × 0.0929)

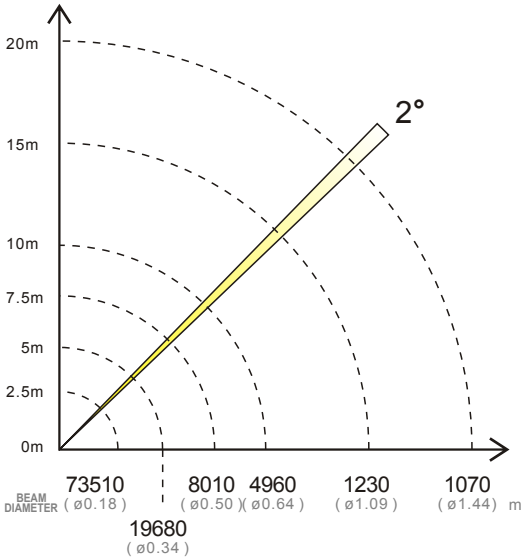

Features

- > A 50W white LED lamp, 7500K
- > 50000 hours life span and low power consumption
- > 8/16 bit smooth and precise resolution for PAN/TILT movement
- > 540°/630° PAN and 270° TILT movement
- > Scan position memory, auto reposition after unexpected movement
- > Specific optic system with 2° projection angle
- > Improved optics and flat beam field
- > 1 Static gobo wheel with 17 gobos plus open
- > 1 Color wheel with 7 colors plus open
- > Variable direction rainbow effect with speed adjustable
- > 1*8 Facet prism with variable speed and direction
- > 0-100% Linear LED dimmer
- > 25T/sec high speed LED shutter/strobe effect with variable speed
- > Preset variable/random strobe and dimming pulse effect
- > 9/11 DMX channels USITT DMX-512
- > DMX512, master-slave, and sound activated controllable or auto operation (7

- built-in programs)
- > DMX recorder and edit function integrated
- > Red background LED display
- > Powercon connector IN
- > 3-Pin XLR connectors IN/OUT
- > Fan cooling system
- > Constant temperature readout and management function
- > -20~ 45°C max ambient temperature
- > IP20 protection rating
- > 55dB at 3' dB rating
- > 1*Hanging kit
- > 1* Safety attachment point

Specifications

| | |
|---------------------|--|
| Input Voltage: | AC100-240V 50/60Hz |
| LED Quantities: | 1*50W white LED |
| Control Signal: | DMX512, master-slave and sound activated or auto |
| Control Channel: | operation |
| Power Consumption: | 9/11 DMX channels USITT DMX-512 |
| Dimensions: | 125W |
| Packing Dimensions: | 149(D)*270(W)*364(H)mm |
| Net Weight: | 240(D)*350(W)*450(H)mm |
| Gross Weight: | 6.20kg |
| | 8.03kg |

